



PCT/GB 2003 / 0 0 3. 1 0 9



INVESTOR IN PEOPLE

10 / 52257 1

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

28 JAN 2005

REC'D 14 AUG 2003

WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Stephen Hordley*

Dated

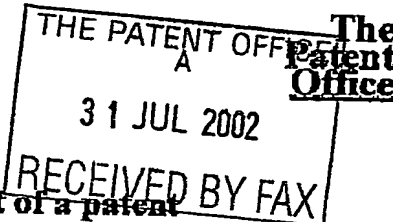
5 August 2003

BEST AVAILABLE COPY

EFFECTIVE

02 E737196-1 002877  
P.0700 0.00-0217608.9

## Patents Form 1/77

Patents Act 1997  
(Rule 16)

1/77

## Request for grant of a patent

(see the notes on the back of this form. You can also get  
an explanatory leaflet from the Patent office to help  
you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1 Your reference

-HQI-54035- 001 51061/98

2 Patent application number  
(The Patent Office will fill in this part)

0217608.9

31 JUL 2002

3 Full name, address and postcode of the or of  
each applicant (underline all surnames)

Imperial Chemical Industries PLC

935006

20 Manchester Square, London, W1U 3AN and

Unichema Chemie BV

8293193002

Buurte 2, 2800 AA, Gouda, Netherlands

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the  
country/state of its incorporation

United Kingdom and Netherlands

4 Title of the invention

Epoxy Resin Composition

5 Name of Your Agent (if you have one)

HUMPHRIES, Martyn

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)Uniqema Intellectual Property Dept  
Wilton Centre  
Wilton  
Redcar  
England, TS10 4RF

Patents ADP Number (if you know it)

3979556005

6 If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or each of these

Country	Priority Application number (if you know it)	Date of Filing (day / month / year)
---------	---	--

7 If this application is divided or otherwise derived from an  
earlier UK application, give the number and filing date of  
the earlier application

Number of earlier application	Date of Filing (day / month / year)
-------------------------------	--

8 Is a statement of inventorship and of right to grant of a  
patent required in support of this request?

Yes

Answer yes if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See Note (d)

## Patents Form 1/77

- 9 Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 15 ✓

Claim(s) 3 ✓

Abstract 1 ✓

Drawings

Wm

- 10 If you are also filing any of the following state how many against each item

Priority documents

Translations of priority documents

Statement of Invention and right to grant of a patent (Patents Form 7/77)

Request for Preliminary Examination and search (Patents Form 9/77) 1 ✓

Request for Substantive Examination (Patents Form 10/77)

Any other documents (Please specify)

11

I/We request the grant of a patent on the basis of this application

Signature

Date 31.07.02

- 12 Name and daytime telephone number of person to contact in the United Kingdom

HUMPHRIES, Martyn  
01642 436286

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been issued, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Epoxy Resin Composition

DUPLICATE

**Field of Invention**

- 5 The present invention relates to a composition comprising an epoxy resin and an impact modifier, and in particular to the use thereof as an adhesive.

**Background**

- 10 Epoxy resins are widely used in many industrial applications. Epoxy resins have good thermal and chemical resistance, in addition to effective electrical and mechanical properties enabling their use, in particular, as an adhesive on a wide range of substrates. Epoxy resins are particularly useful in microelectronics. One such application is as a die-attach adhesive to bond a chip or die to a carrier or a circuit
- 15 board. However, in some applications epoxy resins are generally too brittle, lacking the flexibility required, for example, to cope with thermal cycling. Flexibility can be imparted to an epoxy resin by incorporating an impact modifier. Suitable materials are described in US-6242513-B (column 5, lines 35-62). Liquid synthetic rubbers such as functionalised polybutadiene copolymers are particularly preferred, especially in
- 20 microelectronic applications. Unfortunately, the components of synthetic rubbers can be toxic, and it is preferred not to use these materials for environmental reasons. In addition, moisture uptake of an epoxy adhesive containing synthetic rubber can be a problem which can lead to thermal instability or "popcorning" of the completed electronic device. Such materials can also suffer from ionic contamination by alkali
- 25 metal and chloride ions which can result in corrosion of the electrical components.

**Summary of the Invention**

- 30 We have now surprisingly discovered an epoxy resin composition which reduces or substantially overcomes at least one of the aforementioned problems.

Accordingly, the present invention provides a composition comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol.

The invention also provides a prepolymer comprising in the range from 40 to 80% by weight of epoxy resin, and 20 to 60% by weight of impact modifier, wherein the impact modifier comprises in the range from 15 to 50% by weight of at least one dimer fatty acid and/or dimer fatty diol.

5

The invention further provides a cured epoxy resin composition comprising impact modifier particles having an aspect ratio in the range from 0.7 to 1.3:1, and a mean particle diameter in the range from 0.8 to 5  $\mu\text{m}$ .

10

The invention further provides the use of a composition comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol as an adhesive.

15

The invention further provides an electronic assembly adhesive comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol.

20

The invention still further provides a method of forming a composition which comprises (i) reacting an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol with a first epoxy resin to form a prepolymer, and (ii) mixing the prepolymer with a second epoxy resin, and optionally (iii) curing the composition.

25

The epoxy resin preferably contains more than one 1,2-epoxy group per molecule. Such epoxides are well known in the art and are described in Y. Tanaka, "Synthesis and Characteristics of Epoxides", in C. A. May, ed., Epoxy Resins Chemistry and Technology (Marcel Dekker, 1988). They can be saturated or unsaturated aliphatic, cycloaliphatic, or heterocyclic groups and can be monomeric or polymeric in nature. The weight per epoxide of such resins is preferably in the range from 100 to 2,000.

30

Suitable epoxy resins are the glycidyl polyethers of polyhydric phenols which are derived from an epichlorohydrin, eg epichlorohydrin, and a polyhydric phenol. Examples of such polyhydric phenols include resorcinol, hydroquinone, bis(4-hydroxyphenyl)-2,2-propane ("bisphenol A") 4,4'-dihydroxybenzophenone, bis(4-hydroxyphenyl)-1,1-ethane, bis(4-hydroxyphenyl)-1,1-isobutane, bis(4-hydroxyphenyl)-2,2-butane, bis(2-

dihydroxynaphthyl)methane, phloroglucinol, and bis(4-hydroxyphenyl)sulphone. Other polyhydric phenols include novolac resins containing more than two phenol, optionally substituted, moieties linked through methylene bridges, in addition to halogenated phenolic compounds.

5

Other epoxy resins include glycidyl polyethers of polyhydric alcohols prepared by reacting a polyhydric alcohol with an epihalohydrin using a Lewis acid catalyst, eg boron trifluoride, followed by treatment with an alkaline dehydrogenating agent.

10

Suitable polyhydric alcohols include glycerine, ethylene glycol, propylene glycol, diethylene glycol, hexanediol, hexanetriol, trimethylolpropane, trimethylolethane, and pentaerythritol.

15

Additional epoxy resins are glycidyl esters of polycarboxylic acids derived from an epihalohydrin and a polycarboxylic acid. Suitable polycarboxylic acids include phthalic acid, phthalic anhydride, isophthalic acid, terephthalic acid, tetrahydrophthalic acid, hexahydrophthalic anhydride, adipic acid, dimerised fatty acids, and dibasic acids made from an unsaturated fatty acid and acrylic acid.

20

The most preferred epoxy resins are glycidyl polyethers of polyhydric phenols, particularly the glycidyl polyethers of bisphenol A, the advanced diglycidyl ethers of bisphenol-A, the diglycidyl ethers of bisphenol-F, styrene oxide, cyclohexene oxide, and the glycidyl ethers of phenol and other alkyl phenols. Diglycidyl ethers of bisphenol-A and the advanced diglycidyl ethers of bisphenol-A are particularly preferred, and especially the advanced diglycidyl ethers of bisphenol-A.

25

The epoxy resins preferably have a molecular weight number average in the range from 800 to 6,000, more preferably 1,000 to 3,000, particularly 1,200 to 2,000, and especially 1,400 to 1,600.

30

The impact modifier used in the present invention comprises and/or is formed from at least one dimer fatty acid and/or dimer fatty diol and/or equivalent thereof.

The term dimer fatty acid is well known in the art and refers to the dimerisation product of mono- or polyunsaturated fatty acids and/or esters thereof. Preferred dimer fatty acids are dimers of C<sub>10</sub> to C<sub>30</sub>, more preferably C<sub>12</sub> to C<sub>24</sub>, particularly C<sub>14</sub> to

$C_{22}$ , and especially  $C_{18}$  alkyl chains. Suitable dimer fatty acids include the dimerisation products of oleic acid, linoleic acid, linolenic acid, palmitoleic acid, and elaidic acid. The dimerisation products of the unsaturated fatty acid mixtures obtained in the hydrolysis of natural fats and oils, e.g. sunflower oil, soybean oil, olive oil, rapeseed oil, cottonseed oil and tall oil, may also be used. Hydrogenated, for example by using a nickel catalyst, dimer fatty acids may also be employed.

In addition to the dimer fatty acids, dimerisation usually results in varying amounts of oligomeric fatty acids (so-called "trimer") and residues of monomeric fatty acids (so-called "monomer"), or esters thereof, being present. The amount of monomer can, for example, be reduced by distillation. Particularly preferred dimer fatty acids used in the present invention, have a dicarboxylic (or dimer) content of greater than 50%, more preferably greater than 70%, particularly greater than 85%, and especially greater than 94% by weight. The trimer content is preferably less than 50%, more preferably in the range from 1 to 20%, particularly 2 to 10%, and especially 3 to 6% by weight. The monomer content is preferably less than 5%, more preferably in the range from 0.1 to 3%, particularly 0.3 to 2%, and especially 0.5 to 1% by weight.

Dimer fatty diols can be produced by hydrogenation of the corresponding dimer fatty acid. The same preferences above for the dimer fatty acid apply to the corresponding dimer fatty diol component of the impact modifier.

The impact modifier is preferably an oligomer or polymer (hereinafter referred to as a polymer) formed from, ie comprises reaction residues of, at least one dimer fatty acid and/or dimer fatty diol and/or equivalent thereof. Suitable polymers include polyesters, polyamides, polyesteramides and polyurethanes. The function of the impact modifier is to increase the flexibility and/or toughness of the epoxy resin composition.

The molecular weight (number average) of the impact modifier is preferably in the range from 200 to 30,000, more preferably 600 to 20,000, particularly 800 to 15,000, and especially 1,000 to 10,000.

UQI 51061

5

In one preferred embodiment of the present invention, the impact modifier comprises an oligoester or polyester. Polyester is normally produced in a condensation reaction between at least one polycarboxylic acid and at least one polyol. Dicarboxylic acids and diols are preferred. The preferred dicarboxylic acid component of the polyester impact modifier used in the present invention comprises at least one dimer fatty acid, as described above.

The dicarboxylic acid component of the polyester impact modifier preferably also comprises non-dimeric fatty acids. The non-dimeric fatty acids may be aliphatic or aromatic, and include dicarboxylic acids and the esters, preferably alkyl esters; thereof, preferably linear dicarboxylic acids having terminal carboxyl groups having a carbon chain in the range from 2 to 20, more preferably 6 to 12 carbon atoms, such as adipic acid, glutaric acid, succinic acid, pimelic acid, suberic acid, azelaic acid, sebacic acid, heptane dicarboxylic acid, octane dicarboxylic acid, nonane dicarboxylic acid, decane dicarboxylic acid, undecane dicarboxylic acid, dodecane dicarboxylic acid and higher homologs thereof. Adipic acid is particularly preferred.

A monomeric dicarboxylic acid anhydride, such as phthalic anhydride, isophthalic anhydride and terephthalic anhydride may also be employed as the or as part of the non-dimeric fatty acid component.

The polyester is preferably formed from dimer fatty acids to non-dimer fatty acids present at a ratio in the range from 10 to 100%:0 to 90%, more preferably 30 to 70%:30 to 70%, particularly 40 to 60%:40 to 60%, and especially 45 to 55%:45 to 55% by weight of the total dicarboxylic acids.

The polyol component of the polyester is suitably of low molecular weight, preferably in the range from 50 to 650, more preferably 70 to 200, and particularly 100 to 150. The polyol component may comprise polyols such as pentaerythritol, triols such as glycerol and trimethylolpropane, and preferably diols. Suitable diols include straight chain aliphatic diols such as ethylene glycol, diethylene glycol, 1,3-propylene glycol, dipropylene glycol, 1,4-butylene glycol, 1,6-hexylene glycol, branched diols such as neopentyl glycol, 3-methyl pentane glycol, 1,2-propylene glycol, and cyclic diols such



as 1,4-bis(hydroxymethyl)cyclohexane and (1,4-cyclohexane-dimethanol). 1,4-butyleneglycol, 1,6-hexyleneglycol and neopentyl glycol are preferred diols.

6 The polyol component may also comprise a dimer fatty diol as described above. The same preferences above for the dimer fatty acid apply to the corresponding dimer fatty diol component of the polyester.

10 The polyester impact modifier is preferably formed from dicarboxylic acid to diol starting materials at a molar ratio in the range from 1.0 to 5.0:1, more preferably 1.1 to 3.0:1, particularly 1.15 to 2.0:1, and especially 1.2 to 1.5:1. Thus, the dicarboxylic acid is preferably present in molar excess so as to obtain a polyester terminated at both ends with acid groups.

15 In a preferred embodiment, the polyester is formed from dimer fatty acid, adipic acid, and at least one diol having a molecular weight in the range from 50 to 650, preferably at a molar ratio in the range from 0.1 to 1:0.3 to 2:1, more preferably 0.15 to 0.6:0.6 to 1.6:1, particularly 0.2 to 0.4:0.8 to 1.3:1, and especially 0.25 to 0.3:1 to 1.1:1.

20 The polyester preferably has a molecular weight (number average) in the range from 800 to 6,000, more preferably 900 to 3,000, particularly 1,000 to 2,000, and especially 1,100 to 1,400.

25 The polyester preferably has a glass transition temperature ( $T_g$ ) in the range from -60 to 0°C, more preferably -50 to -5°C, particularly -40 to -10°C, and especially -35 to -15°C.

30 The polyester preferably has an acid value (measured as described herein) in the range from 10 to 140, more preferably 35 to 125, particularly 55 to 110, and especially 80 to 100 mgKOH/g. In addition, the polyester preferably has a hydroxyl value (measured as described herein) of less than 2, more preferably less than 1.5, particularly less than 1.0, and especially less than 0.6.

In an alternative embodiment of the present invention, the impact modifier comprises an oligoamide or polyamide. Polyamide is normally produced in a condensation

UOI 51061

7

reaction between a dicarboxylic acid and a diamine. The preferred dicarboxylic acid component of the polyamide impact modifier used in the present invention comprises at least one dimer fatty acid as described above. In addition, non-dimer fatty acids may also be employed.

5

Suitable non-dimer fatty acids may be aliphatic or aromatic, and include dicarboxylic acids and the esters, preferably alkyl esters, thereof, preferably linear dicarboxylic acids having terminal carboxyl groups having a carbon chain of from 2 to 20, more preferably 6 to 12 carbon atoms, such as adipic acid, pimelic acid, suberic acid, azelaic acid, sebacic acid, heptane dicarboxylic acid, octane dicarboxylic acid, nonane dicarboxylic acid, decane dicarboxylic acid, undecane dicarboxylic acid, dodecane dicarboxylic acid and higher homologs thereof.

10

The polyamide impact modifier is preferably formed from dimer fatty acids to non-dimer fatty acids present at a ratio of from 10 to 100%:0 to 90%, more preferably 50 to 100%:0 to 50%, particularly 80 to 100%:0 to 20%, and especially 95 to 100%:0 to 5% by weight of the total dicarboxylic acids.

15

Suitable diamines include amine-equivalents of the aforementioned dicarboxylic acids, but generally shorter chain materials are preferred, particularly those containing from 2 to 7 carbon atoms. Diamines such as ethylenediamine, propylenediamine, tetramethylenediamine, pentamethylenediamine, hexamethylenediamine, as well as dimer fatty diamines (derived from dimer fatty acids) are preferred. Suitable aromatic diamines include materials derived from benzene, toluene and other substituted aromatic materials, such as 2,6-tolylenediamine, 4,4-diphenylmethanediamine and xylylenediamine. Other suitable diamines include those which contain one or two secondary amino groups, and heterocyclic diamines, for example piperazine. Branched diamines, such as 3-methyl pentane diamine may also be used. 4,4-diaminophenylsulphone is a particularly preferred diamine.

20

25

30

The weight ratio of dicarboxylic acid to diamine starting materials used to form the polyamide impact modifier is preferably in the range from 1.0 to 5.0:1, more preferably 1.05 to 3.0:1, particularly 1.1 to 2.0:1, and especially 1.2 to 1.4:1. The polyamide is

preferably carboxy terminated at both ends, particularly by dimer fatty acids as described herein.

5 The polyamide preferably has a molecular weight (number average) in the range from 700 to 30,000, more preferably 800 to 15,000, particularly 900 to 10,000, and especially 1,000 to 6,000.

The polyamide preferably has a softening point in the range from 40 to 200°C, more preferably 45 to 125°C, particularly 50 to 100°C, and especially 55 to 85°C.

10 The polyamide preferably has an acid value (measured as described herein) in the range of from 20 to 200, more preferably 40 to 100, particularly 50 to 70, and especially 60 to 65 mgKOH/g. In addition, the polyamide preferably has an amine value (measured as described herein) of less than 10, more preferably less than 5,  
15 particularly less than 3, and especially less than 1 mgKOH/g.

The impact modifier may also be a copolymer, block, random or graft, of polyester and polyamide, at least one, and preferably both, thereof as defined above. In one preferred embodiment the impact modifier is a copolymer, more preferably random,  
20 comprising polyester to polyamide present at a ratio in the range from 10 to 95%:5 to 90%, more preferably 40 to 90%:10 to 60%, particularly 60 to 80%:20 to 40%, and especially 67 to 73%:27 to 33% by weight of the copolymer.

Alternatively, the impact modifier may be a polyurethane, for example formed from  
25 one or more of the aforementioned polyesters, and/or formed by using at least one dimer fatty acid and/or dimer fatty diol as a chain extender.

The impact modifier preferably comprises in the range from 10 to 70%, more preferably 15 to 50%, particularly 20 to 30%, and especially 23 to 27% by weight of  
30 residues of dimer fatty acid and/or dimer fatty diol and/or equivalent thereof.

The weight ratio of epoxy resin:impact modifier present in the composition is preferably in the range from 1 to 20:1 more preferably 1.5 to 10:1, particularly 2 to 4:1, and especially 2.4 to 2.8:1.

In a preferred embodiment of the invention, the impact modifier is reacted with an epoxy resin to form a prepolymer, prior to formation of a composition according to the present invention. These epoxy resins preferably have a molecular weight number average in the range from 200 to 3000, more preferably 220 to 1,000, particularly 230  
5 to 500, and especially 240 to 280. The molecular weight of the epoxy resin used to form the prepolymer is preferably less than the molecular weight of the epoxy resin which is mixed with the prepolymer to form the composition according to the present invention.

10 Particularly useful epoxy resins for forming the prepolymer include the diglycidyl ethers of bisphenol-A, the advanced diglycidyl ethers of bisphenol-A, the diglycidyl ethers of bisphenol-F, styrene oxide, cyclohexene oxide, and the glycidyl ethers of phenol and other alkyl phenols. Diglycidyl ethers of bisphenol-A are particularly preferred. A chain extender such as bisphenol A, and/or bisphenol F is also  
15 preferably used to form the prepolymer.

A catalyst may also be employed, preferably one or more of the normal epoxy resin catalysts, such as paratoluene sulphonic acid (PTSA), ethyl triphenyl phosphonium iodide (ETPI), triphenylphosphine (TPP), and tetrabutyl phosphonium acid acetate  
20 (TBPA).

The prepolymer preferably has a molecular weight (number average) in the range from 10,000 to 80,000, more preferably 15,000 to 50,000, particularly 20,000 to 40,000, and especially 25,000 to 35,000.  
25

The prepolymer preferably comprises in the range from 0.5 to 50%, more preferably 3 to 25%, particularly 7 to 15%, and especially 10 to 13% by weight of residues of dimer fatty acid and/or dimer fatty diol and/or equivalent thereof.

30 The prepolymer preferably comprises in the range from 10 to 80%, more preferably 20 to 60%, particularly 30 to 50%, and especially 40 to 45% by weight of impact modifier. The prepolymer also preferably comprises in the range from 20 to 90%, more preferably 40 to 80%, particularly 50 to 70%, and especially 55 to 60% by weight of epoxy resin.

The weight ratio of epoxy resin:impact modifier present in the prepolymer is preferably in the range from 0.25 to 4:1, more preferably 0.75 to 2:1, particularly 1 to 1.6:1, and especially 1.2 to 1.4:1.

5 The composition according to the present invention preferably comprises in the range from 1 to 40%, more preferably 4 to 20%, particularly 6 to 12%, and especially 8 to 9% by weight of residues of dimer fatty acid and/or dimer fatty diol and/or equivalent thereof.

10 The composition preferably comprises in the range from 3 to 90%, more preferably 10 to 50%, particularly 20 to 35%, and especially 25 to 30% by weight of impact modifier.

In addition, the composition preferably comprises in the range from 10 to 97%, more preferably 50 to 90%, particularly 65 to 80%, and especially 70 to 75% by weight of  
15 epoxy resin. The aforementioned ranges include any epoxy resin originally present in the prepolymer.

The composition according to the present invention is suitably formed by mixing the epoxy resin and impact modifier, preferably in the form of the prepolymer.

20

The composition preferably comprises a suitable catalyst, such as those known in the art for epoxy resins, for example one of the catalysts described above.

The composition may also comprise, other optional components such as fillers, for  
25 example fumed silica, silver flake; and curing agents such as phenolic novolac resins.

The composition according to the invention may be applied as a film on a suitable substrate, and excess solvent removed by heating in an oven, for example at a temperature of less than 100°C. Hot air may be blown through the oven in order to  
30 remove the solvent. The composition can be stored as a dry film prior to use, preferably having a thickness in the range from 10 to 300 µm, more preferably 25 to 150 µm, and particularly 50 to 75 µm. The film can be subsequently cured in situ by heating, for example, at a temperature in the range from 125 to 175°C.

Alternatively, the composition may be applied in situ as a free flowing viscous solid, and cured directly by heating as described above.

5 The composition preferably has an Interfacial Work of Adhesion,  $G_a$  (measured as described herein) of greater than 50, more preferably greater than 70, particularly greater than 90, and especially greater than 110 and up to 150  $\text{Jm}^{-2}$ . The composition preferably has the aforementioned values when maintained under dry conditions, but more preferably, also when conditioned at 85°C/85% relative humidity for 168 hours (known as JEDEC 1). A particular surprising feature of a composition  
10 according to the present invention is that the  $G_a$  values are effectively maintained under moist conditions. Thus, the  $G_a$  value of the composition after conditioning under JEDEC 1 conditions is preferably at least 50%, more preferably at least 70%, particularly at least 90%, and especially 100% of the value obtained prior to conditioning (ie maintained under dry conditions).

15 The composition preferably has an Essential Work of Fracture (measured as described herein) of greater than 9, more preferably in the range from 10 to 20, particularly 12 to 18, and especially 14 to 16  $\text{kJm}^{-2}$ .

20 A particular advantage of compositions according to the present invention, is that on curing, phase separation of the impact modifier can occur resulting in the formation of domains or particles of impact modifier within an epoxy resin matrix.

The impact modifier particles are preferably approximately spherical, suitably having a  
25 mean aspect ratio  $d_1:d_2$  (where  $d_1$  and  $d_2$ , respectively, are the length and width of the particle (measured as described herein)) in the range from 0.6 to 1.4:1, preferably 0.7 to 1.3:1, more preferably 0.8 to 1.2:1, particularly 0.9 to 1.1:1, and especially 0.95 to 1.05:1. In a preferred embodiment of the invention, suitably at least 40%, preferably at least 55%, more preferably at least 70%, particularly at least 80%, and  
30 especially at least 90% by number of particles have an aspect ratio within the above preferred ranges given for the mean aspect ratio.

UQI 51051

12

The impact modifier particles preferably have a mean particle diameter (measured as described herein) in the range from 0.4 to 7  $\mu\text{m}$ , more preferably 0.8 to 5  $\mu\text{m}$ , particularly 1.2 to 3  $\mu\text{m}$ , and especially 1.5 to 2.5  $\mu\text{m}$ .

5 The size distribution of the impact modifier particles can also have a significant effect on the final properties of, for example, a cured epoxy resin composition according to the present invention. In a preferred embodiment of the invention, suitably at least 50%, preferably at least 60%, more preferably at least 70%, particularly at least 80%, and especially at least 85% by number of particles have a particle diameter within the  
10 above preferred ranges given for the mean particle diameter.

In addition, the impact modifier particles preferably have less than 25%, more preferably less 20%, particularly less than 15%, and especially less than 10% by number of particles having a particle diameter of less than 0.5  $\mu\text{m}$ . The impact  
15 modifier particles also preferably have less than 20%, more preferably less 15%, particularly less than 10%, and especially less than 5% by number of particles having a particle diameter of greater than 5  $\mu\text{m}$ .

The composition described herein is suitable for use, preferably as an adhesive,  
20 particularly as an electronic assembly adhesive, for example in electrical and microelectronic applications. The composition may be used in microelectronics manufacturing such as in encapsulation, potting, thin-film coating and embedding of electronic circuits. The composition is particularly suitable for use as a die-attach  
adhesive to bond a chip or die to a carrier or a circuit board.

25

~~The composition may also be used in glass fibre sizing, in automotive applications,~~  
such as in under the hood applications, in electronics, for example as encapsulates  
and potting adhesives.

30 In this specification the following test methods have been employed:

(i) Molecular weight number average was determined by Gel Permeation Chromatography (GPC).

UQI 51061

13

(ii) The softening point and glass transition temperature ( $T_g$ ) were measured by Differential Scanning Calorimetry (DSC) at a scan rate of  $20^\circ\text{C}/\text{minute}$  using a Mettler DSC30.

5 (iii) The hydroxyl value is defined as the number of mg of potassium hydroxide equivalent to the hydroxyl content of 1g of sample, and was measured by acetylation followed by hydrolysis of excess acetic anhydride. The acetic acid formed was subsequently titrated with an ethanolic potassium hydroxide solution.

(iv) The acid value is defined as the number of mg of potassium hydroxide required to neutralise the free fatty acids in 1g of sample, and was measured by direct titration  
10 with a standard potassium hydroxide solution.

(v) The amine value is defined as the number of mg of potassium hydroxide per 1g of sample, and was measured by direct titration with a standard potassium hydroxide solution, followed by titration with hydrochloric acid using bromophenol blue as an indicator.

15 (vi) Particle Size of the impact modifier particles was determined by immersing a cured epoxy resin sample in liquid nitrogen, preparing thin sections by microtoming, and performing scanning electron microscopy. Photographs were produced at an appropriate magnification, such that about 50 impact modifier particles were displayed in each photograph. A minimum number of 300 particles were sized manually using a  
20 transparent size grid. The mean particle diameter, and particle size distribution, of the particles were calculated from the above measurements. In addition, the aspect ratio of the particles was determined from the maximum and minimum dimensions of at least 50 particles. Alternatively, the measurements could be performed by computerised image analysis.

25 (vii) Substrate adhesion was measured using T Peel Testing. T-Peel specimens were constructed as laminates containing a film of uncured adhesive of thickness 0.2 to 1 mm, between strips of thin copper foil of thickness 150 to 200  $\mu\text{m}$ . The samples were cured for 1 hour at  $175^\circ\text{C}$  prior to testing. During the test, the copper strips were pulled apart whilst recording load, peel deflection and peel angles. Using knowledge of  
30 the tensile properties of the copper peel arms, the recorded data can be analysed to obtain the Interfacial Work of Adhesion,  $G_a$  (in  $\text{Jm}^{-2}$ ). Specimens were tested dry and after conditioning at  $85^\circ\text{C}/85\%$  relative humidity for 168 hours (known as JEDEC 1).

(viii) Cohesive properties of cured films (prepared as described in Example 1) were determined by measuring the so-called "Essential Work of Fracture" (European



Structural Integrity Society (ESIS) Technical Committee 4 (TC4)) Protocol for Elastic-Plastic fracture mechanics approach using films). Essential Work was performed in tension on double edge notched specimens with varying ligament lengths, cut from cured thin films of thickness 150  $\mu\text{m}$ . The resultant force/deflection data was analysed to obtain the Essential Work of Fracture (in  $\text{kJm}^{-2}$ ).

The invention is illustrated by the following non-limiting example.

#### Example 1

##### 10 i) Prepolymer Formation

54.5 g of impact modifier (polyester having a molecular weight of 1200, made from Pripol 1017 (dimer fatty acid) (trade mark, ex-Uniqema)/adipic acid (50/50 by weight/neopentyl glycol)) and 49.9 g of epoxy resin (diglycidyl ether of bisphenol-A having a molecular weight of 260) were charged to a round bottomed flask fitted with an air driven stirrer, nitrogen inlet and condenser. The oil bath was heated to 95°C, and 0.06 g of catalyst added. The reaction was then held at 95°C for 15 minutes, after which time the reaction temperature was increased to 145°C. A further 0.08 g of catalyst was added, followed by 5.6 g of bisphenol A. Three further 5.6 g portions of bisphenol A were added every 5 minutes. The reaction was then held at 145°C until the viscosity of the reaction increased significantly (approximately 30 minutes). The reaction was quenched by adding approximately 75 ml of MEK (methyl ethyl ketone), and the reaction temperature was reduced to 83°C and held at this temperature for approximately 60 minutes. After this time, the heat was switched off and the reaction allowed to cool to room temperature. The prepolymer solution was then poured into a tray made from mould release paper and allowed to stand in a fume cupboard to allow the majority of the MEK to evaporate. The remaining MEK was removed under vacuum at approximately 90°C, and the prepolymer cooled and stored in a freezer until required.

30 The resultant prepolymer had an impact modifier content of 42.9% by weight, and an epoxy resin content of 57.1% by weight. The prepolymer contained 11% by weight of residues of dimer fatty acid.

## ii) Epoxy Resin Composition Formation

39.7 g of the prepolymer formed above, 15.1 g of epoxy resin (diglycidyl ether of bisphenol-A having a molecular weight of 1,500), 4.4 g of a phenolic novolac resin, and 0.88 g catalyst were weighed into a 500 ml jar and 150 ml MEK was added. A magnetic bar was also added, and the mixture stirred until complete dissolution of all components had been achieved. The resin solution was poured into a tray prepared from mould release paper, and the MEK allowed to evaporate in a fume cupboard overnight. The remaining MEK was removed under vacuum at about 90°C for no longer than 20 minutes.

The resultant composition had an impact modifier content of 28.3% by weight, a prepolymer content of 66.3% by weight, and contained 7% by weight of residues of dimer fatty acid.

## iii) Film Formation

Small amounts of the MEK free compositions produced above were compression moulded between two sheets of mould release paper in order to form films of thickness 150  $\mu\text{m}$ . To produce uncured films, compression was carried out at 60°C using a pressure of 10 tonnes between two 12" platens (Moore Press). In order to produce cured film, the uncured films produced above were heated from room temperature to 175°C over a period of 30 minutes using a pressure of about 3-5 tonnes. The films were maintained at 175°C for 60 minutes and then allowed to cool.

The materials were subjected to the test procedures described herein and exhibited the following properties;

- (i) Mean particle size of the impact modifier = 1  $\mu\text{m}$ .
- (ii) Interfacial Work of Adhesion,  $G_a = 100 \text{ Jm}^{-2}$  (dry), and  $100 \text{ Jm}^{-2}$  (JEDEC 1).
- (iii) Essential Work of Fracture =  $15 \text{ kJm}^{-2}$ .

The above example illustrates the improved properties of an epoxy resin composition according to the present invention.

**CLAIMS**

1. A composition comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol.

5

2. A composition according to claim 1 wherein the impact modifier comprises polyester.

10

3. A composition according to claim 2 wherein the polyester is formed from dimer fatty acids to non-dimer fatty acids at a ratio in the range from 30 to 70%:30 to 70% by weight of the total dicarboxylic acids.

15

4. A composition according to either one of claims 2 and 3 wherein the polyester is formed from dimer fatty acid, adipic acid, and at least one diol having a molecular weight in the range from 50 to 650.

5. A composition according to any one of the preceding claims wherein the impact modifier comprises polyamide.

20

6. A composition according to any one of the preceding claims wherein the impact modifier comprises in the range from 15 to 50% by weight of dimer fatty acid and/or dimer fatty diol.

25

7. A composition according to any one of the preceding claims wherein the weight ratio of epoxy resin:impact modifier is in the range from 1.5 to 10:1.

8. A composition according to any one of the preceding claims comprising in the range from 10 to 50% by weight of impact modifier.

30

9. A composition according to any one of the preceding claims comprising in the range from 4 to 20% by weight of dimer fatty acid and/or dimer fatty diol.

10. A composition according to any one of the preceding claims wherein the impact modifier is reacted with an epoxy resin to form a prepolymer, prior to formation of the composition.
- 5 11. A composition according to claim 10 wherein the prepolymer comprises in the range from 20 to 60% by weight of impact modifier.
12. A composition according to any one of the preceding claims wherein the Interfacial Work of Adhesion,  $G_a$  is greater than  $70 \text{ Jm}^{-2}$ .
- 10 13. A composition according to any one of the preceding claims wherein the Essential Work of Fracture is in the range from 12 to  $18 \text{ kJm}^{-2}$ .
14. A prepolymer comprising in the range from 40 to 80% by weight of epoxy resin, and 20 to 60% by weight of impact modifier, wherein the impact modifier comprises in the range from 15 to 50% by weight of at least one dimer fatty acid and/or dimer fatty diol.
- 15 15. A cured epoxy resin composition comprising impact modifier particles having an aspect ratio in the range from 0.7 to 1.3:1, and a mean particle diameter in the range from 0.8 to  $5 \mu\text{m}$ .
- 20 16. A composition according to claim 15 wherein at least 60% by number of the impact modifier particles have a particle diameter in the range from 0.8 to  $5 \mu\text{m}$ .
- 25 17. A composition according to either one of claims 15 and 16 wherein less than 25% by number of impact modifier particles have a particle diameter of less than  $0.5 \mu\text{m}$ .
- 30 18. A composition according to any one of claims 15 to 17 wherein less than 20% by number of impact modifier particles have a particle diameter of greater than  $5 \mu\text{m}$ .
19. The use of a composition comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol as an adhesive.

20. An electronic assembly adhesive comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol.

6 21. A method of forming a composition which comprises (i) reacting an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol with a first epoxy resin to form a prepolymer, and (ii) mixing the prepolymer with a second epoxy resin, and optionally (iii) curing the composition.

10 22. A method according to claim 21 wherein the molecular weight of the first epoxy resin is less than the molecular weight of the second epoxy resin.

15

20

25

30

UQI 51061

19

**ABSTRACT**

A composition comprising an epoxy resin and an impact modifier comprising at least one dimer fatty acid and/or dimer fatty diol. The composition is suitable for use as an adhesive, particularly in microelectronics.

0043072 31 JUL 02 10:31

\*ok TOTAL PAGE.23 \*ok

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**